



Republic Brass Sales, Inc.
 619.229.8304
 6566 Federal Blvd
 Lemon Grove, CA 91945
 www.republicbrasssales.com

HOSE MEDIUM PRESSURE MIL-H-24136/3

Specification: MIL-H-24136/3

Pressure Rating: 350 - 1000 PSI

Sizes: 1/4" - 2"

Application: Fresh and salt water systems, fuel systems,
 oil applications and low pressure air

Operating Temperature Range: -40°F to +200°F

FITTING REFERENCE: MIL-F-24787


SAE 37°:
 411-RBS

CPV:
 190911-RBS
 191301-RBS

FLANGE:
 190109-RBS
 190016-RBS
 190124-RBS
 190103-RBS

SPLIT CLAMP:
 FC9423-RBS
 FC9424-RBS
 FC9425-RBS
 FC9426-RBS

DOGLEG:
 191302-RBS
 190093-RBS

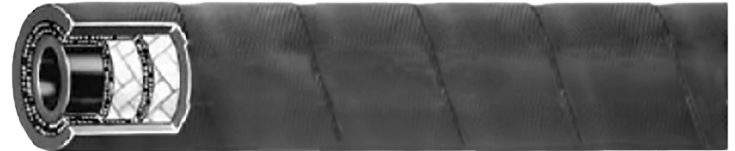

MIL-H-24136/3
 EQUAL TO AEROQUIP P/N 2580

**CONSTRUCTION: SYNTHETIC RUBBER TUBE, DOUBLE TEXTILE BRAID
 REINFORCEMENT AND SYNTHETIC RUBBER COVER**

RBS P/N	EQUAL TO AEROQUIP NUMBER	HOSE SIZE	HOSE O.D.	WORKING PRESSURE	MIN. BEND RADIUS	WEIGHT/FT.
24136/3-4	2580-4	1/4	0.52	1,000 PSI	3.00	0.12
24136/3-6	2580-6	3/8	0.67	650 PSI	4.00	0.17
24136/3-8	2580-8	1/2	0.77	625 PSI	4.62	0.19
24136/3-10	2580-10	5/8	0.92	600 PSI	5.50	0.28
24136/3-12	2580-12	3/4	1.08	550 PSI	6.50	0.34
24136/3-16	2580-16	1	1.23	500 PSI	7.38	0.36
24136/3-20	2580-20	1 1/4	1.50	450 PSI	9.00	0.43
24136/3-24	2580-24	1 1/2	1.75	400 PSI	10.50	0.51
24136/3-32	2580-32	2	2.22	350 PSI	13.25	0.75

